




Absorbed Power AGM GT12-100C

The C series range of AGM Batteries are designed specifically to have a large amount of stored current discharge between charging sessions. With a heavy non-porous battery plate, a different active chemical paste material and a stronger electrolyte than normal batteries, the C range of batteries produce superior performance for high power output and excellent deep cycle applications.

Battery Model	GT12-100C			
Designed Cycle Life	> 350 cycles @ -0.5CA to 9.6V			
Capacity (25°C)	20HR (5.1 A, 1.75V)	10HR (10A, 1.75V)	5HR (17A, 1.75V)	1HR (64A, 1.75V)
	102Ah	100Ah	85Ah	64Ah
Dimensions	Length	Width	Height	Total Height
	330mm (13.0inch)	172mm (6.77inch)	215mm (8.46inch)	221mm(8.70inch)
Approx. Weight	31.0Kg (68.35 lbs)			
Internal Resistance	Full charged at 25°C: 0.005 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp. (20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle Use		Float Use	
	14.4-15V(-30mV/°C), max. Current: 25A		13.6-13.8(-20mV/ °C)	
CCA	850			
Terminal Type	M6 Threaded Insert			

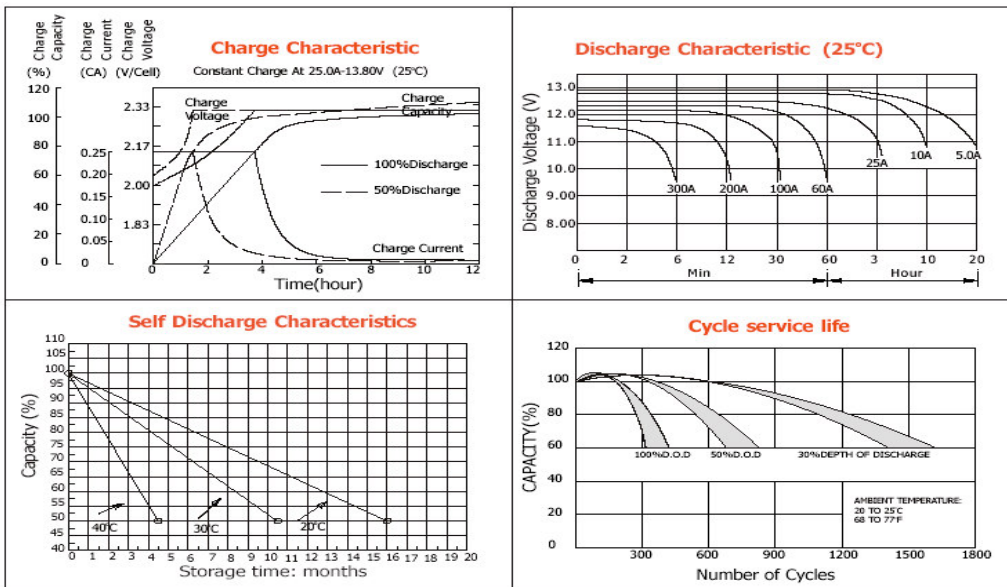

Applications

- Car Audio
- Cruiser / Yacht
- General Marine
- Caravan / Camping
- Large Car / Small Truck
- House Boat
- 4WD
- Truck
- Performance Vehicle
- Standby Power

**24 month warranty
Refer to warranty
policy for terms and
conditions**