

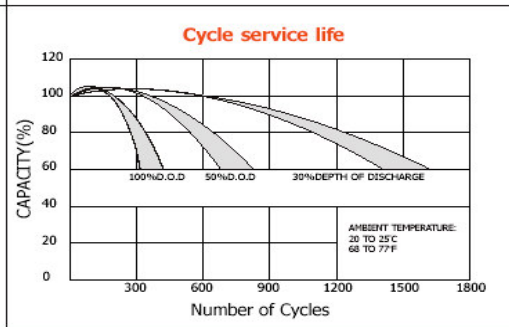
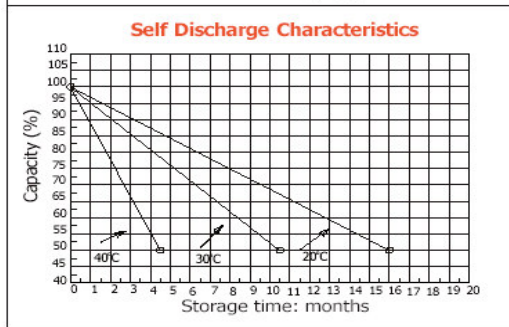


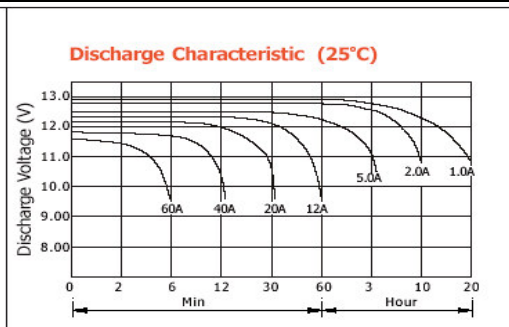

## Absorbed Power AGM GT12-18C

The C series range of AGM Batteries are designed specifically to have a large amount of stored current discharge between charging sessions. With a heavy non-porous battery plate, a different active chemical paste material and a stronger electrolyte than normal batteries, the C range of batteries produce superior performance for high power output and excellent deep cycle applications.

|   |   |                    |                      |                    |
|---|---|--------------------|----------------------|--------------------|
| <b>Battery Model</b>                    | <b>GT12-18C</b>                             |                    |                      |                    |
| <b>Designed Cycle Life</b>              | > 350 cycles @ -0.5CA to 9.6V               |                    |                      |                    |
| <b>Capacity (25°C)</b>                  | 20HR (1.0A, 1.75V)                          | 10HR (1.8A, 1.75V) | 5HR (3.06A, 1.75V)   | 1HR (12.6A, 1.75V) |
|   | 20Ah  | 18Ah               | 15.3Ah               | 12.6Ah             |
| <b>Dimensions</b>                       | Length                                      | Width              | Height               | Total Height       |
|   | 181mm (7.13inch)                            | 77mm (3.03inch)    | 167mm (6.57inch)     | 167mm(6.57inch)    |
| <b>Approx. Weight</b>                   | 6.0Kg (13.23 lbs)                           |                    |                      |                    |
| <b>Internal Resistance</b>              | Full charged at 25°C: 0.014 Ohm             |                    |                      |                    |
| <b>Self Discharge</b>                   | 3% of capacity declined per month at (25°C) |                    |                      |                    |
| <b>Capacity Affected by Temp (20HR)</b> | 40°C  | 25°C               | 0°C                  | -15°C              |
|   | 102%  | 100%               | 85%                  | 65%                |
| <b>Charge Voltage (25°)</b>             | Cycle Use                                   |                    | Float Use            |                    |
|   | 14.4-15V(-30mV/°C), max. Current: 5.4A      |                    | 13.6-13.8(-20mV/ °C) |                    |
| <b>CCA</b>                              | 250   |                    |                      |                    |
| <b>Terminal Type</b>                    | M5 Threaded Insert                          |                    |                      |                    |

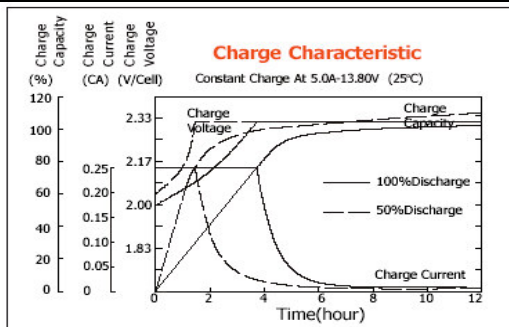

### Applications

- Large Motorbike
- Jet Ski
- Wheel Chair
- Performance Vehicle
- Radio / Comms Support
- Control System
- Vacuum Cleaner
- Medical Equipment
- UPS
- Marine Electrics

**24 month warranty**  
**Refer to Warranty Policy for terms and conditions**