



ABSORBED POWER

Ph. 07 327 26221 or 1300 303 498

Email. paul@absorbedpower.com





Web. www.absorbedpower.com



Absorbed Power AGM GT12-40C

The C series range of AGM Batteries are designed specifically to have a large amount of stored current discharge between charging sessions. With a heavy non-porous battery plate, a different active chemical paste material and a stronger electrolyte than normal batteries, the C range of batteries produce superior performance for high power output and excellent deep cycle applications.

Battery Model	GT12-40C			
Designed Cycle Life	> 350 cycles @ -0.5CA to 9.6V			
Capacity (25°C)	20HR (2.05 A, 1.75V)	10HR (4A, 1.75V)	5HR (6.9A, 1.75V)	1HR (26.8A, 1.75V)
	41Ah	40Ah	34.5Ah	26.8Ah
Dimensions	Length	Width	Height	Total Height
	197mm (7.76inch)	165mm (6.50inch)	170mm (6.69inch)	170mm(6.69inch)
Approx. Weight	13.7Kg (30.2 lbs)			
Internal Resistance	Full charged at 25°C: 0.0095 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp. (20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle Use		Float Use	
	14.4-15V(-30mV/°C), max. Current: 10A		13.6-13.8(-20mV/°C)	
CCA	400			
Terminal Type	Standard Terminal			

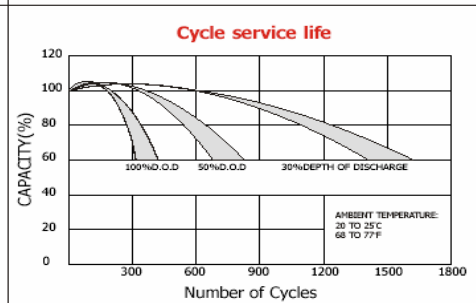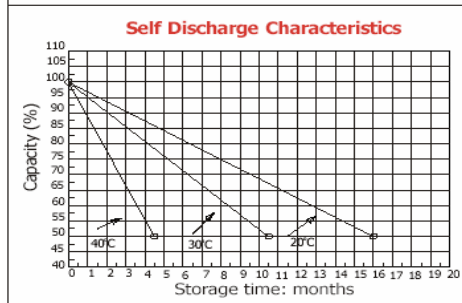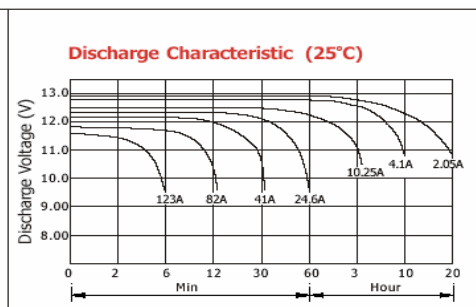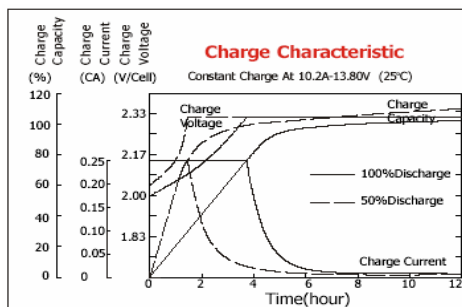

Applications

- General Marine
- Medium Cruiser
- Performance Vehicle
- Personal Mobility Scooter
- Radio / Comms Support
- Small / Medium Car
- Day Cruiser
- Speed Boat
- Wheel Chair
- Mobility Scooters

24 month warranty
Refer to warranty
policy for terms and
conditions