



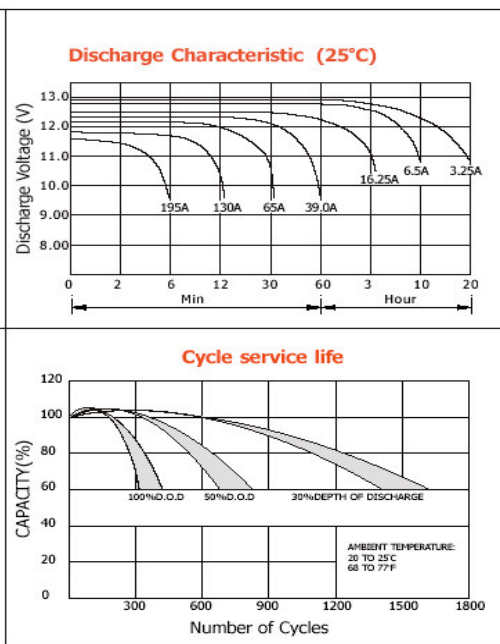

Absorbed Power AGM GT12-65C

The C series range of AGM Batteries are designed specifically to have a large amount of stored current discharge between charging sessions. With a heavy non-porous battery plate, a different active chemical paste material and a stronger electrolyte than normal batteries, the C range of batteries produce superior performance for high power output and excellent deep cycle applications.

| Battery Model | GT12-65C | | | |
|-----------------------------------|---|--------------------|----------------------|------------------|
| Designed Cycle Life | > 350 cycles @ -0.5CA to 9.6V | | | |
| Capacity (25°C) | 20HR (3.3 A, 1.75V) | 10HR (6.5A, 1.75V) | 5HR (11A, 1.75V) | 1HR (40A, 1.75V) |
| | 66Ah | 65Ah | 55Ah | 40Ah |
| Dimensions | Length | Width | Height | Total Height |
| | 355mm (13.98inch) | 167mm (6.58inch) | 179mm (7.05inch) | 183mm(7.21inch) |
| Approx. Weight | 22.7Kg (50.05 lbs) | | | |
| Internal Resistance | Full charged at 25°C: 0.006 Ohm | | | |
| Self Discharge | 3% of capacity declined per month at (25°C) | | | |
| Capacity Affected by Temp. (20HR) | 40°C | 25°C | 0°C | -15°C |
| | 102% | 100% | 85% | 65% |
| Charge Voltage (25°C) | Cycle Use | | Float Use | |
| | 14.4-15V(-30mV/°C), max. Current: 16.3A | | 13.6-13.8(-20mV/ °C) | |
| CCA | 550 | | | |
| Terminal Type | Standard Terminal | | | |

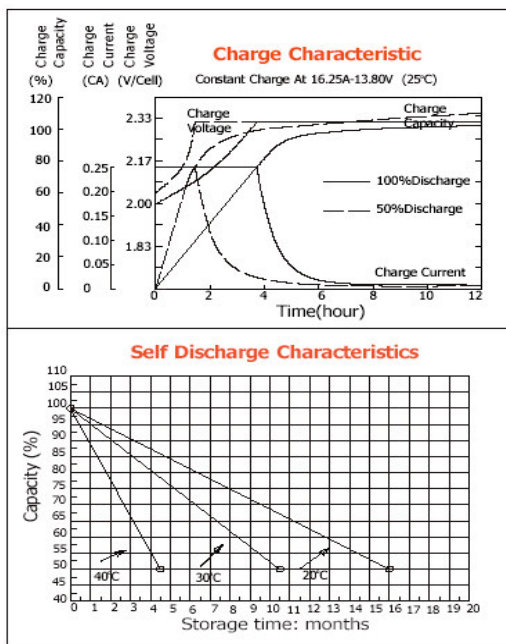

Applications

- Car Audio
- Cruiser / Yacht
- House Boat
- Caravan
- Small Yacht
- Personal Mobility Scooter
- General Marine
- Small Car
- Truck
- Wheel Chair

**24 month warranty
Refer to warranty
policy for terms and
conditions**