







ABSORBED POWER
 Ph. 07 33978677 or 1300 303 498
 Email. paul@absorbedpower.com
 Web. www.absorbedpower.com



Absorbed Power AGM GT12-90C

The C series range of AGM Batteries are designed specifically to have a large amount of stored current discharge between charging sessions. With a heavy non-porous battery plate, a different active chemical paste material and a stronger electrolyte than normal batteries, the C range of batteries produce superior performance for high power output and excellent deep cycle applications.

Battery Model	GT12-90C			
Designed Cycle Life	> 350 cycles @ -0.5CA to 9.6V			
Capacity (25°C)	20HR (4.6 A, 1.75V)	10HR (9A, 1.75V)	5HR (15.3A, 1.75V)	1HR (61A, 1.75V)
	92Ah	90Ah	76.5Ah	61Ah
Dimensions	Length	Width	Height	Total Height
	305mm (12.0inch)	168mm (6.62inch)	208mm (8.20inch)	226mm(8.90inch)
Approx. Weight	28.9Kg (63.7 lbs)			
Internal Resistance	Full charged at 25°C: 0.0052 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp. (20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle Use		Float Use	
	14.4-15V(-30mV/°C), max. Current: 22.5A		13.6-13.8(-20mV/ °C)	
CCA	700			
Terminal Type	M6 Threaded Insert			

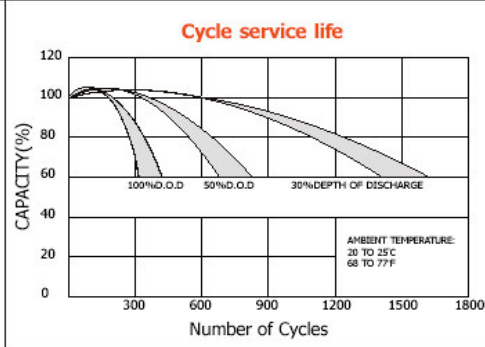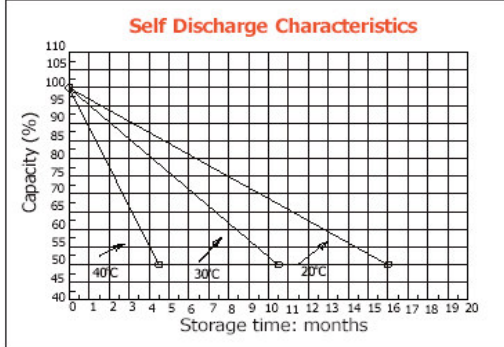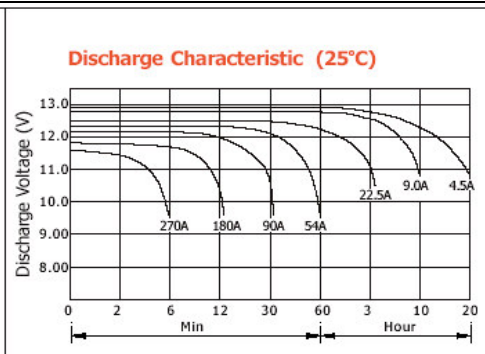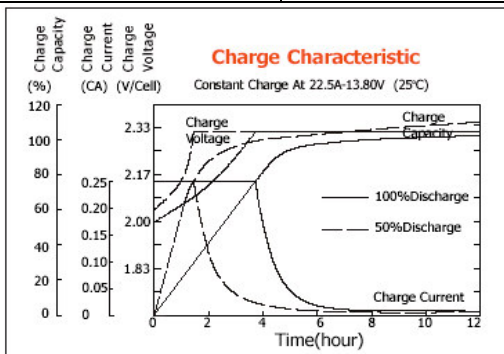

Applications

- 4WD
- Caravan / Camper
- General Marine
- Cruiser / Yacht
- Large Car / Small Truck
- Performance Vehicle
- Standby Power
- Truck
- Wheel Chair
- Speed Boat

24 month warranty
Refer to warranty policy for terms and conditions